

Specifications

| | |
|-----------------------------|--|
| Display Technology | Liquid Crystal Display |
| LCD Panel | 3x0.64" (16:10) |
| Brightness (ISO lumens) | 4000 Lumens |
| Resolution | WUXGA (1920x1200) |
| Number of pixels | 6,912,000 pixels (1920x1200x3) |
| Contrast | 1500000:1 |
| Center to corner uniformity | > 90% |
| Lens | F1.8, f=6.08mm |
| Screen size | 60" - 150" |
| Throw distance | 0.54m~1.39m |
| Throw Ratio | 0.42 |
| Light Source (Service life) | Laser diode (Normal mode: 20000h, Eco mode: 25000h) |
| Keystone Correction | Vertical: ±40%(Auto, Manual), Horizontal: ±15%(Manual) |
| Input Terminals | PC: VGA (D-sub 15pin) x 1 |
| | Audio: Audio in: mini jack x 1 (3.5mm) |
| | Video: HDMI x 2, Video x 1 (RCA) |
| Output Terminals | Other: USB-Type A x 2 |
| | VGA (D-sub 15pin) x 1, Audio out (Mini-jack) x 1 (3.5mm) |
| Control Terminals | Rs232 (D-sub 9pin) x 1, RJ-45 x 1 (Control) |
| PC input signal | PC-VGA, SVGA, XGA, SXGA, WXGA, UXGA, WUXGA / Mac |
| Video input signal | PAL, SECAM, NTSC (480i, 480p, 576i, 576p, 720p, 1080i, 1080p) |
| Scanning Frequency | Horizontal: 15~90kHz, Vertical: 24~85Hz |
| Noise | Normal mode: 37dB, Eco mode: 29dB |
| Projection Method | Ceiling/floor, front/rear |
| Speaker | 10W x 1 |
| Weight | 6.5 KG |
| Dimension (WxHxD) | 420x100x350mm (not incl. protruded part) |
| Power Supply | 100~240V AC (50/60Hz) |
| Power Consumption | 275W max |
| Standby power consumption | ≤0.3 W |
| Operating Environment | Operating temperature: 0°C~40°C, Operating humidity: 20%~85% (non-condensation) |
| Standard accessory | Wireless remote control, power cord |
| Functions | <ul style="list-style-type: none"> Quick start and Quick off One-button black screen function Corner Keystone Correction Compatible with PJ-Link `AMX `Crestron Password locking and anti-theft lock latch Blackboard modes for colored screen surfaces USB Memory Viewer |





POWERING THE VISION

VU-U4C

Specifications Sheet

Projection Distance

XGA (4:3 aspect ratio)

| Screen Size (inch) | Distance |
|--------------------|----------|
| 60" | 0.55 |
| 70" | 0.65 |
| 80" | 0.75 |
| 90" | 0.85 |
| 100" | 0.94 |
| 120" | 1.14 |
| 150" | 1.40 |

WXGA (16:10 aspect ratio)


| | |
|------|------|
| 60" | 0.54 |
| 70" | 0.64 |
| 80" | 0.74 |
| 90" | 0.83 |
| 100" | 0.93 |
| 120" | 1.12 |
| 150" | 1.39 |

WUXGA (16:10 aspect ratio)

| | |
|------|------|
| 60" | 0.54 |
| 70" | 0.64 |
| 80" | 0.74 |
| 90" | 0.83 |
| 100" | 0.93 |
| 120" | 1.12 |
| 150" | 1.39 |



Dimension (Unit: mm)

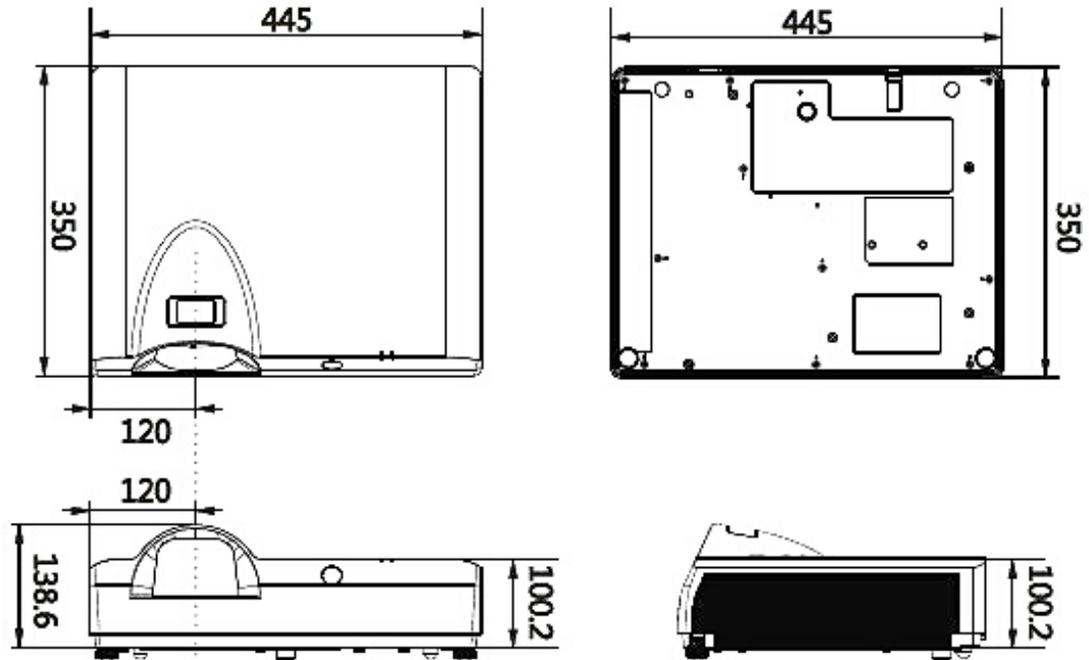

*Specifications and the product's design are subject to change without notice.

** Brightness specification may vary dependent upon lens throw ratio

*** Registration for 6th & 7th year warranty is required.

